

# MAXIPRO 150

NEW DESIGN 2024-EVEN MORE RESISTANT

Directly from the race courses

A parasol designed to cover large surfaces in a professional setting. A powerful, elegant structure with an exclusive image, the absolute protagonist of your auditorium. It has a reliable and rapid opening and closing system combined with top-of-the-range construction quality

- Larger version of the Maxipro: With 150mm pole, joints and reinforced cue holder collar

- Coverage of large spaces and stalls up to **56Sqm**

- Quality in materials and fine nautical finishes

- Durable and reliable over time

## USAGE OCCASIONS



BAR & ICECREAM SHOPS



HOTEL & RESORT



NAUTICAL



RESTAURANTS & FAST FOOD



POOLS AND BEACH RESORTS



CATERING & BANQUETTING




SKI & MOUNTAINS



GARDENS & TERRACES

## FEATURES

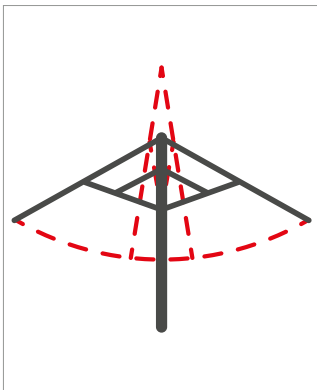

Telescopic opening for closing above tables



Opening with AISI 316 **stainless steel nautical** pulley with **easy block** locking system and polyester nautical rope



**THREADED CANVAS TECHNOLOGY** with special aluminum alloy profile with nose cones that improves water and wind performance



**High tenacity aluminum** alloy frame painted with epoxy powder in white or manganese standard colours



**TIG-welded aluminum** rib port collars



**Aluminum arm-rib joints** for greater resistance and durability



### MODULAR CANOPY

With interchangeable modular canvases in segments for easy replacement of even a single segment.

*Version with crank opening with worm screw available on request.  
Not recommended in situations where rapid opening and closing is necessary.*



35cm perimeter **volant** available



**Stainless steel** bolts and nuts



**Central pole in round aluminum** with diameter 150x3 Mm



Premium **PVC storage case**




Curved profiles in **aluminum 6005** 57x25x2/50x20x2 Mm



Also available **tailor-made**

**HEIGHT OPTIONS**

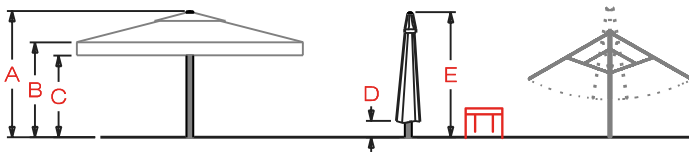

**SQUARED**

			A	B	C	D	E
<b>700</b>		12 Ribs 49 Sqm MAXI150-7X7	420	290	255	100	620
<b>750</b>		12 Ribs 56 Sqm M150-7,5X7,5	425	293	258	80	625

**RECTANGULAR**

			A	B	C	D	E
<b>600</b>		12 Ribs 48 Sqm MAXI150-8X6	382	298	263	78	582
<b>700</b>		12 Ribs 56 Sqm MAXI150-8X7	405	295	260	<b>65</b>	605
<b>600</b>		14 Ribs 54 Sqm MAXI150-9X6	426	293	258	<b>70</b>	625

**ROUND**

			A	B	C	D	E
<b>DIAM. 800</b>		12 Ribs 50 Sqm MAXI150-D8	382	265	230	160	575
<b>DIAM. 850</b>		12 Ribs 56,7 Sqm MAXI150-D8,5	392	280	245	150	580



Frame RAL color -CO-



Fabric colors not in the collection

-SUPTESS-



Premium PVC Storage Case -FODPVC5-

**FRAME COLOR**



-BI- -MA-



-BI- -MA-




**TYPE OF FABRIC**



up to 600 gr/Sqm

**PVC / PVC BLACKOUT**  
-PVC-



**NAUTICAL HP**  
-RES-



**PVC / PVC BLACKOUT**  
-PVC-

**NAUTICAL HP**  
-RES-



**PVC / PVC BLACKOUT**  
-PVC-

**NAUTICAL HP**  
-RES-



**EXTRA PRICE**

custom sizes for square/ rectangular parasols

-CONUMA-



**CUSTOM SHAPES**

parasols with irregular shapes

-CONUMAC-



**INCREASED HEIGHTS**

parasol heights exceeding standard


-SUPALT-



**MOTORIZED VERSION**

Automated opening and closing system with remote control.

-AAMP-


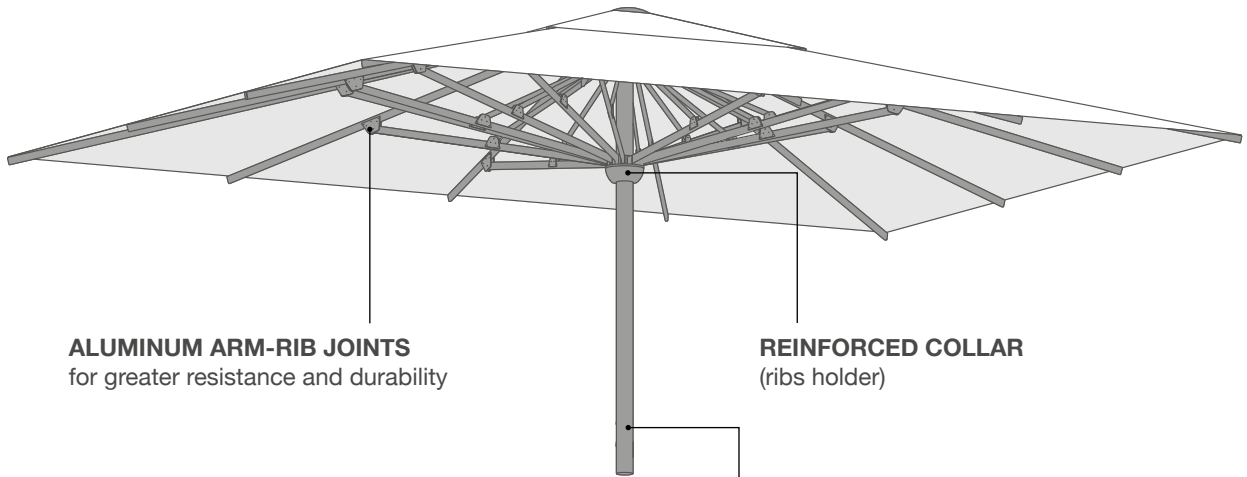


**ALUMINUM ARM-RIB JOINTS**  
for greater resistance and durability

**REINFORCED COLLAR**  
(ribs holder)

**SUPPORT POLE**  
ø 150x3 Mm.

I VOLANT

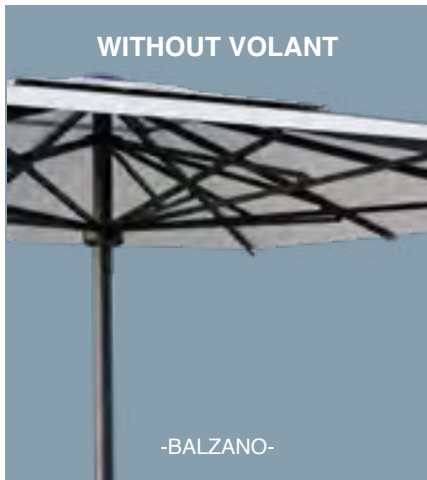

CLASSIC VOLANT VARIANTS


TRANSFER LETTERING ON VOLANT



MONOCHROME HEAT-SEALED  
EXCLUDING GRAPHICS

	200 Cm	100 Cm
	25 Cm	25 Cm
	-SCLOGO200-	-SCLOGO100-

TRANSFERT LETTERING ON SEGMENT

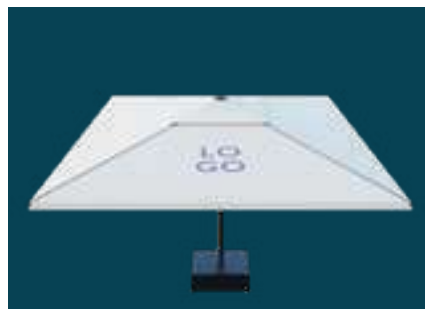

MONOCHROME HEAT-SEALED  
ON SEGMENT  
(inevitable slight fabric wrinkles),  
EXCLUDING GRAPHICS

	80 Cm
	80 Cm
	-SCLOGO8080-


COMPLEX AND/OR COLORED WRITINGS/LOGOS



**GUTTER PREPARATION**

With female Velcro hidden by fabric flap **OUTSIDE THE VOLANT.**

**-APVELG-**

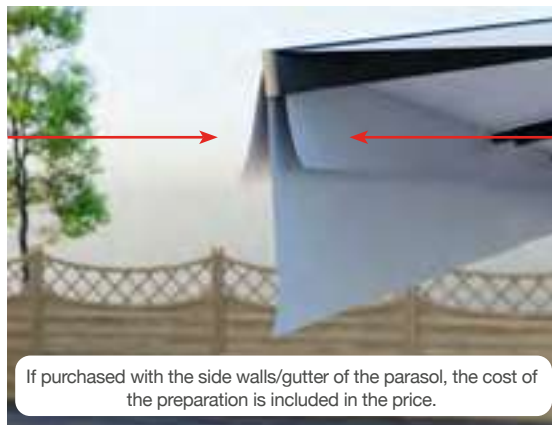

**SIDE WALLS PREPARATION**


With female Velcro hidden by fabric flap **INSIDE THE VOLANT.**

**-APVELP-**



**UNION GUTTER APPLIED WITH REMOVABLE ZIPPER AND VELCRO**

Made of PVC, with slope, and applied externally to the skirts. Version with buckles available upon request for umbrellas not predisposed.

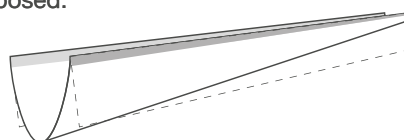


**-GRO-**




**CENTRAL INTERSECTION CONE FOR 4 PARASOLS**

Applied with bracket on a corner rib.



**-CONO-**

**| WINTER EQUIPMENT**

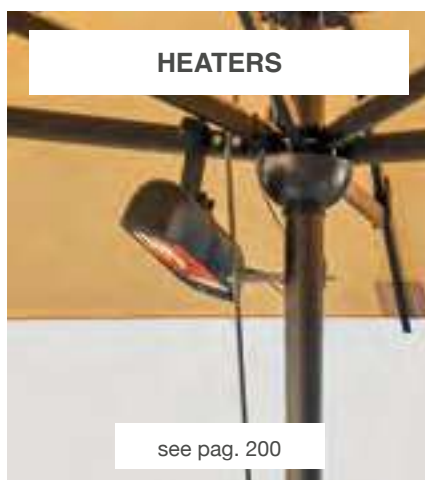




# SUPPORT BASES

The base recommended in our price list takes into account the square meters of the parasol and a theoretical overturning coefficient of approximately 50 km/h with constant wind. Such recommendation does not constitute any guarantee by the manufacturer, as it is inde-





ed difficult to measure whether there are gusts in a specific location. Therefore, **it is always recommended to close the parasol in case of bad weather.** In particularly windy areas, we always advise securing the parasol to the ground.

## SUPPORT BASE



-  White  
-BI-
-  Manganese  
-MA-
-  Ral Selection  
-CO-




In **galvanized and painted steel**. Prepared to accommodate **56** washed stone PLATES.


			
130x130 cm	30 cm	50 kg	130x135 x26 Cm




CODE -BAP130130-

## LOW-SEAT COVER BASE UNIT



-  White  
-BI-
-  Manganese  
-MA-
-  Ral Selection  
-CO-




 **135x135**  
Cm **In painted aluminum.**


		
49 cm	30 kg	140x75 x50 Cm

CODE -CAR135-




## SERVICE TABLE COVER CASE



-  White  
-BI-
-  Manganese  
-MA-
-  Ral Selection  
-CO-

 **140x140**  
Cm

With a top in galvanized and painted steel and walls in fabric. Mandatory if purchasing the automatic version.

		
52 cm	16 kg	33x22 x40 Cm


CODE -BATAV140-

## SET OF 56 PLATES



Set of 40 PLATES 50x50 and 16  
PLATES 40x40

 In washed stone  
50x50+  
40x40  
Cm

  
4  
cm

  
1.080  
kg

  
120x100  
x66 Cm

CODE -LAS56X50-



# FIXING BASES


THE USE OF ANCHOR BLOCKS presupposes a careful evaluation of the conditions of the surface to be drilled. We strongly recommend carrying out core drilling beforehand to check the presence and thickness of uncracked concrete.

We do not recommend fixing with anchors on other types of surfaces such as asphalt, pavé, on terraces, garage floors, etc. even if helped by the chemist. Check the absence of electrical cable pipes or insulating sheaths in the ground before drilling.





## JOINTED BASE FOR STANDARD FIXING

-  White  
-BI-
-  Manganese  
-MA-
-  Ral Selection  
-CO-



 50x50  
Cm

In galvanized and painted steel.  
16 mm plugs of variable length (not supplied).


 30 cm	 +1 cm	 38 kg	 50x50 x40 Cm
---	---	---	--

CODE -BFPM150-




## COVER CASE FOR ARTICULATED BASE

-  White  
-BI-
-  Manganese  
-MA-
-  Ral Selection  
-CO-



 51x51  
Cm

For standard fixing base.  
Necessary if you purchase bot-  
tom-powered LEDs.

 25 cm	 3 kg	 55x55 x40 Cm
---	--	--





CODE -CARM150-

## SET OF 6 LONG BOLTS

THE USE OF ANCHOR BOLTS embedded in non-cracked concrete casting is always the optimal solution. It is recommended to create a plinth proportionate to the size of the parasol.




To be embedded in a non-cracked concrete casting of variable dimensions depending on the size of the parasol and the installation site for an articulated base for fixing to the floor

 16 mm	 45 cm	 10 kg	 30x50 x5 Cm
--	---	---	---

CODE -TIRM150-







*The LEDs we use are Made In Italy and compliant with the Ecodesign 2021 directives*



**/ 100 cm LED bars** in anodized aluminum



**/ IP/67 Waterproof 24V power supply**



**/ Warm light** selected 2700 K  
**On request:** cold light or RGB light kit (color change - 24 V)



**/ IP65 Waterproof 24 V 14 W/Mt**



**/ Wi-Fi receiver** with remote control, batteries, and dimmer (light intensity adjustment)




**/ Connector** socket and plug 3p  
Screw D5-12 IP66/IP68

\*The length of the LED bars may be shorter for certain parasol sizes.

**MADE IN ITALY**

## / POSITIONING




### / TOWARDS THE CANOPY

Recommended for a greater scenic effect on light-colored fabric.

**STANDARD**

- LEDUP -




### / DOWNWARD

Recommended for greater illumination on the floor area.

**STANDARD**

- LEDDOWN -




### / TOWARDS THE CANOPY + DOWNWARD

Independent lighting/intensity adjustment for above and below.

NOT- STANDARD

- LEDMIX -

### 8 BARS



#### POWER SUPPLY

(270x70x40 Mm)

Qty: 1,150 Watt IP/67

#### CONSUMPTION


4.8 A

#### POWER

115.2 W

- VLD8X10060 -

### 12 BARS



#### POWER SUPPLY

(270x70x40 Mm)

Qty: 1,240 Watt IP/67

#### CONSUMPTION


7.2 A

#### POWER

172.8 W

- VLD12X10060 -

### 14 BARS



#### POWER SUPPLY

(270x70x40 Mm)

Qty: 1,240 Watt IP/67

#### CONSUMPTION

8.4 A

#### POWER

201.6 W

- VLD14X10060 -



**RGB LED ADD-ON** INFORMATION AND TECHNICAL DATA SHEET AVAILABLE UPON REQUEST

/ POWER SUPPLY



**A - FROM THE TOP**



If the cable is coming from a wall of the room, the parasol can be opened and closed without unplugging the power plug.

-ALCAP-

**B - FROM THE RIB**




Power supply from one of the slats of the parasol (it is necessary to indicate which slat the power cable will come from).

-ALSTE-

**ATTENTION!** To close the parasol it will be necessary to unhook the power plug.

**C - POLE ABOVE BASE**

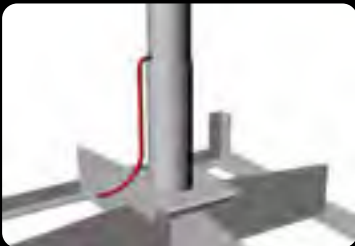

If the cable is coming from the floor, the parasol can be opened and closed without unplugging the power plug.

-ALPALU-

**D - POLE UNDER BASE**



Aesthetically better solution as long as there is space to carry out the wiring underneath the flooring (e.g. floating floors, platforms or wells). The parasol can be opened and closed without unplugging the power plug.



-ALPALD-

# LITHIUM BATTERY FOR LED 24V



\*Approximate duration with 4 1m LED bars kept at maximum power: 6h



SPECIAL 15Ah LITHIUM BATTERY KIT FOR 24V LED SYSTEMS

**INDICATIVE MEASURES**

10X10X40 CM

**LEGEND**

**L** = parasol side  
**1/2 L** = half parasol side  
**D** = Distance from walls/other elements  
**MINIMUM 8 CM**

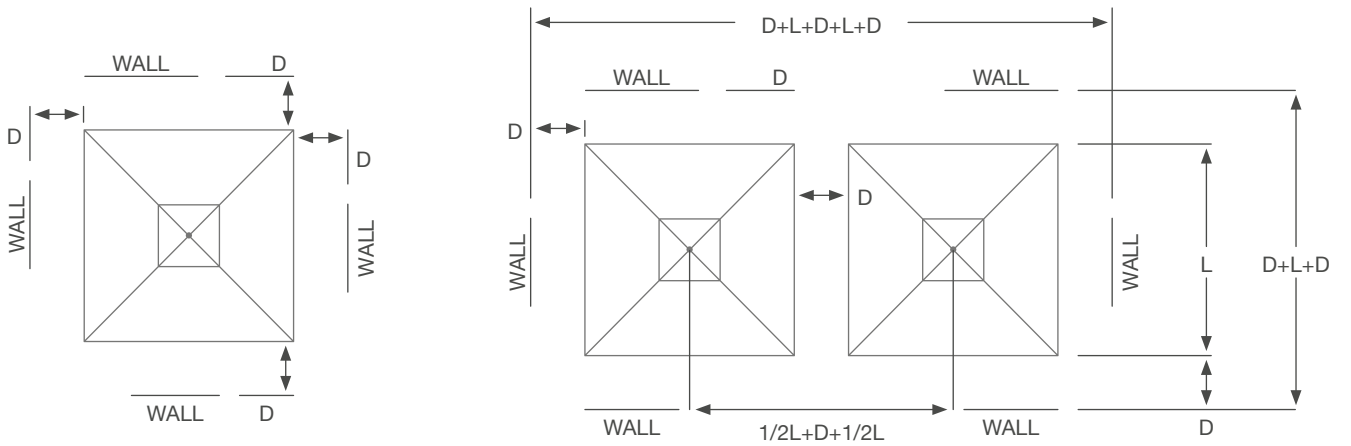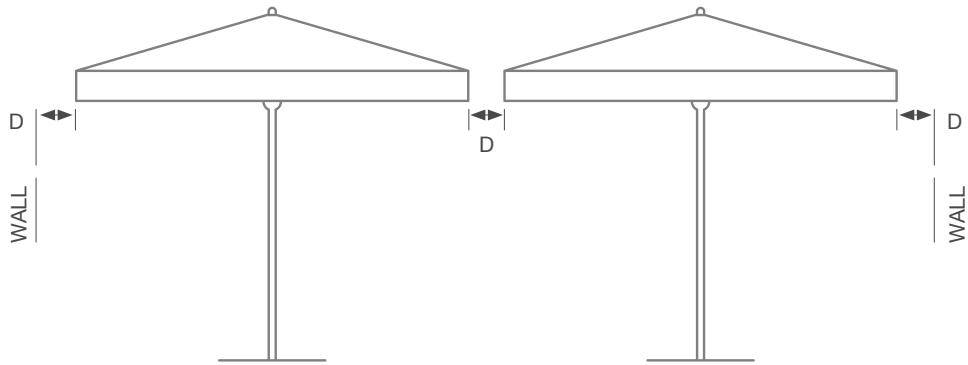

## PACKAGING

PARASOL OPEN SIZE (Cm)	N° RIBS	WEIGHT (Kg)	PACKAGE DIMENSIONS	
SQUARED				
700x700	12	130	Cm 640x62x62	Kg. 30
750x750	12	140	Cm 635x62x62	Kg. 30
RECTANGULAR				
800x600	12	130	Cm 595x62x62	Kg. 30
800x700	12	140	Cm 615x62x62	Kg. 30
900x600	14	155	Cm 635x62x62	Kg. 30
RECTANGULAR				
DIAM. 800	12	130	Cm 685x62x62	Kg. 30
DIAM. 850	12	135	Cm 590x62x62	Kg. 30



**Weights are indicative and exclude base and packaging.  
Packaging weights and dimensions may vary without notice.**

**High-quality reinforced cardboard boxes with 2/3 layers.**

